




METALIZED BOPP MBOPP1

Metalized BOPP - is coextruded one side plasma treated metalized, other side low heat sealable BOPP film suitable for 2 ply laminate for packaging applications. StockPKG Films Metalized BOPP complies with FDA and EC regulations for food packaging applications.

One side plasma treated Metalized other heat sealable at 105 C.

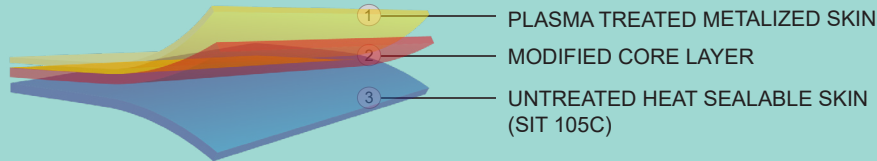

FEATURES:

- Excellent heat seal strength & surface gloss on metalized side
- Good barrier properties
- Good anchorage of lamination adhesive on metalized side
- Good Metal Bond Strength & Machinability
- Good Hot-Tack and Seal Strength

APPLICATIONS:

2 ply laminate for high speed snacks food packaging

PROPERTIES	TEST METHOD	UNIT	15	18	20	25	30	35	40	50
Nominal Thickness	Internal	Micron	15	18	20	25	30	35	40	50
Grammage	Internal	Gauge	60	72	80	100	120	140	160	200
Yield	Internal	in ² / lb	51456	42880	38662	30930	25728	22073	19331	15465
		m ² / kg	73.2	61	55	44	36.6	31.4	27.5	22
Optical Density (Min)	ASTM D 1003	-	2	2	2	2	2	2	2	2
Coefficient of Friction	ASTM D 1894	Kinetic	UT/UT	.38	.38	.38	.38	.38	.38	.38
Tensile Strength	ASTM D 882	kg / cm ²	MD	1200	1200	1200	1200	1200	1200	1200
			TD	2400	2400	2400	2400	2400	2400	2400
Elongation (Tolerance ±15%)	ASTM D 882	%	MD	200	200	200	200	200	200	200
			TD	60	60	60	60	60	60	60
Shrinkage at 120°C for 5 Minutes	Internal	%	MD	4	4	4	4	4	4	4
			TD	2	2	2	2	2	2	2
SIT @ 2 bar pressure, time 1 second (Tolerance ±2°C)	Internal	OC	UT/UT	105	105	105	105	105	105	105
HS Strength @ 120°C, 2 Bar pressure, dwell time 1 sec.	Internal	gm / 25mm	UT/UT	325	350	400	400	450	450	450
WVTR at 38°C, 90%RH	ASTM F 1249	gm / m ² / 24h		.90	.80	.70	.65	.60	.55	.50
		gm / 100Inch ² / 24h		.058	.051	.045	.041	.038	.038	.035
OTR at 23°C, 0% RH	ASTM D 3985	cc / m ² / 24h		90	85	80	75	65	60	60
		cc / 100Inch ² / 24h		5.8	5.5	5.2	4.8	4.2	4.2	3.9

* MD = Machine Direction, * TD = Transverse Direction

Storage & Handling: Needs to be stocked in a closed warehouse & should not be exposed to direct sun light or light sources. Avoid extreme of humidity and heat. It is recommended to store below 40°C in dry places in original packing.

Food Contact: Complies with EC (EU 202/2014 & EU 10/2011) and FDA (21 CFR § 175.105 & 21 CFR § 175.300) regulations on packaging for direct contact with foodstuffs. Specific document and MSDS are available on request.

Disclaimer: The information given above is to the best of our knowledge and experience. Some of the properties can be changed as a result of suppliers' efforts to improve upon the quality or production efficiency of the subject. The information is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. StockPKG makes no warranty, express or implied, as to the fitness of the product for any specific use or purpose. The above data is purely for readers' consideration, investigation and verification and should be read in conjunction with the conditions for sale or contract.